


Spring Plunger

SMALL TYPE

SPL (Light Load Type)
SPSH (Heavy Load Type)

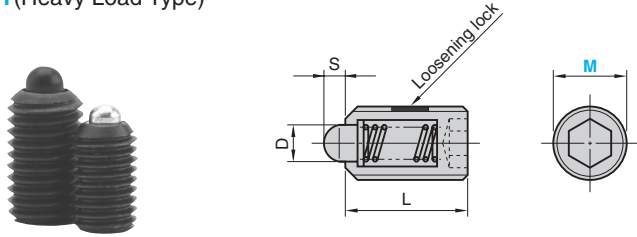

Material : SCM435
Hardness : 36 to 40 HRC
Surface Treatment : Black chromating
Galvanizing

S Travel	D	L	M × P	SPL Load N (kgf)		SPSH Load N (kgf)		Catalog No.	M
				Initial	Final	Initial	Final		
1.5	2.5	12	M 5 × P0.8	1.9(0.2)	7.8(0.8)	4.9(0.5)	14.7(1.5)	SPL SPSH	5
	3.0	13	M 6 × P1.0	2.9(0.3)	9.8(1.0)	5.8(0.6)	19.6(2.0)		6
2.0	4.0	15	M 8 × P1.25						8
2.5	5.0	16	M10 × P1.5	4.9(0.5)	14.7(1.5)	9.8(1.0)	29.4(3.0)		10
3.5	6.0	20	M12 × P1.75						12
4.5	8.0	22	M16 × P2.0	9.8(1.0)	29.4(3.0)	19.6(2.0)	58.8(6.0)		16


Order
 SPSH **12**

See page 46 for plunger wrench.

Spring Plunger

SHORT TYPE

SPL (Light Load Type)
SPH (Heavy Load Type)

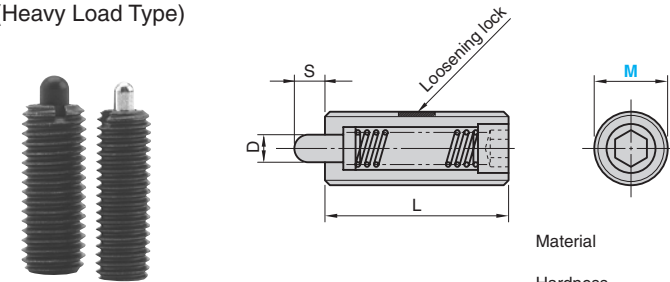

Material : Nose SK4
Thread SCM435
Hardness : 36 to 40 HRC
Surface Treatment : Black chromating
Galvanizing


S Travel	D	L	M × P	SPL Load N (kgf)		SPH Load N (kgf)		Catalog No.	M
				Initial	Final	Initial	Final		
1.5	1.0	10	M 3 × P0.5	—	—	0.4(0.05)	2.9(0.3)	SPH	3
2.0	1.6	12	M 4 × P0.7	—	—	1.9(0.2)	9.8(1.0)		4
3.0	2.0	20	M 5 × P0.8	1.9(0.2)		3.9(0.4)	19.6(2.0)	SPL SPH	5
	2.5	25	M 6 × P1.0		9.8(1.0)	7.8(0.8)	29.4(3.0)		6
4.0	3.1	25	M 8 × P1.25	2.9(0.3)					8
5.0	3.8	30	M10 × P1.5		14.7(1.5)	9.8(1.0)	49.0(5.0)	SPL SPH	10
	5.5		M12 × P1.75	1.9(0.2)	9.8(1.0)				12

Order
 SPH **12**

See page 46 for plunger wrench.

Spring Plug

NH




Material : SAE1065

d	L	Catalog No.	D
4.4	8	NH	6
5.6			8
6.4	12	NH	10
8.0			12
9.0			13
11.0			16

Order
 NH **10**

EX Example

- Drilling plug to access tap is not required.
- Plungers can be easily removed with a dowel pin removing tool.



Dowel Pin Removing Tool