



# Distance Stop Block


SQUARE TYPE

Addition CAD FILE


SDBH  
SDBN

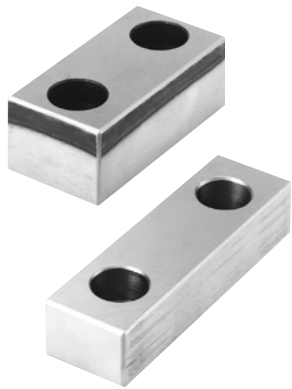

SDBH (Hardened Type)



SDBN



Material : S45C  
Area to be induction hardened (Hatched Area)  
HRC55 or more

H	L1	Catalog No.	W	L	T	Safety color				
6	30	SDBH SDBN	30	60	20	R(Red) Y(Yellow) N(None)				
	50			80						
	70			100						
15	30			60						
	50			80						
	70			100						
6	50		40	50	80		30			
	70				100					
	15				80					
15	50				70			100	80	50
	70								100	
	20								100	
6	50	75	125	80		30				
	70			100						
	15			100						
15	70			80	140		80	30		
	80						120			
	20						100			
20	75	75	125			75	50			
	80					120				
	100					140				

Order **Catalog No.** **W** - **L** - **T** - **Safety color**  
SDBH 30 - 80 - 20 - R

Option

Option Code	Specification
TG	When the same height is required, simultaneous grinding is carried out. Variation of dimension T is within ±0.01.



Order SDBH40 - 80 - 20 - Y - TG

# For Distance Block Shim Plate

SQUARE TYPE

Addition

SDBS

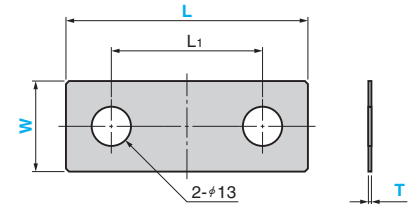

T	Tolerance
0.05	±0.01
0.1 0.2	±0.02
0.3 0.5	

Material : SUS304

L1	Catalog No.	W	L	T
30	SDBS	30	80	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
50	SDBS	50	100	0.1
				0.2
				0.3
				0.5
				0.05
				0.1
70	SDBS	70	140	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
50	SDBS	40	100	0.3
				0.5
				0.05
				0.1
				0.2
				0.3
70	SDBS	75	125	0.5
				0.05
				0.1
				0.2
				0.3
				0.5

Order **Catalog No.** **W** - **L** - **T**  
SDBS 40 - 80 - 0.1

The order unit is one piece.