
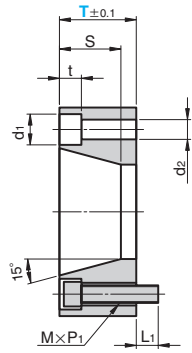


Stroke End Block

FOR PRESS-FIT TYPE GUIDE POST

CAD FILE

SEBT

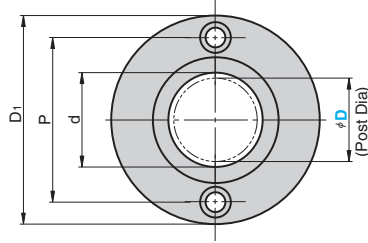

Material: SS400
Includes: Mounting bolt


D	D ₁	d	P	d ₁	d ₂	t	L ₁	M×P ₁	T	S
40	95	43	75	14	9	10	10	M8 × 1.25	20	18
50	115	53	90	18	11	12	17	M10 × 1.5	25	23
60	125	63	100						30~	28
80	150	83	120	20	13	15	20	M12 × 1.75		

Catalog No.	D	T	Safety color
SEBT	40	20	R (Red)
		25	
		30	
	50	40	Y (Yellow)
		20	N (None)
		25	
30			
		35	
		40	

Catalog No.	D	T	Safety color
SEBT	60	20	R (Red)
		25	
		30	
	80	40	Y (Yellow)
		20	N (None)
		25	
30			
		35	
		40	

Order **Catalog No.** SEBT - **D** 50 - **T** 30 - **Safety color** Y

EX Example

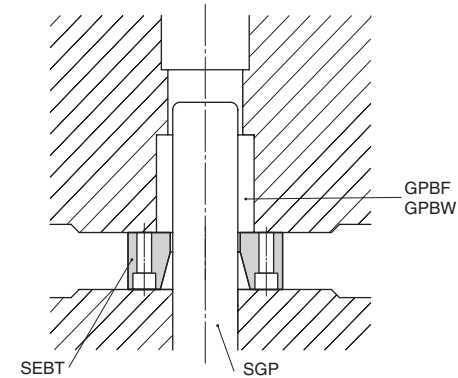

- It is also used as bushing Retainer.
- It is designed to prevent interference between the mounting bolt and the bushing.

Option

Option Code	Specification
TG	When ordering in sets, the height is maintained in tolerance ± 0.01 .
TN	Groove can be machined as shown (To allow for measuring die shut height)

Order **SEBT 50 - 30 - Y - TG**

• Specification TN

