


Guide Post

FOR BELL CRANK LIFTER UNIT

SBGP

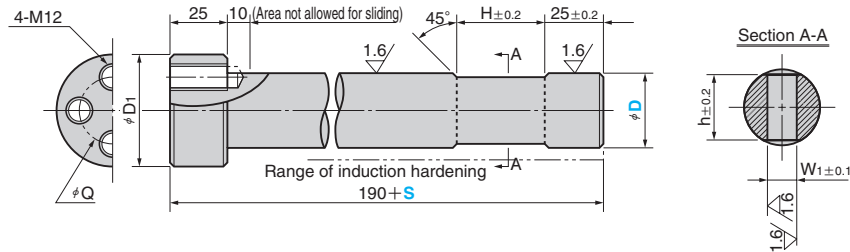

*S refers to travel.

Material : S45C
Hardness : HRC55 or more


Catalog No.	D	Tolerance	Travel S In increments of 1 mm	D ₁	Q	H	W ₁	h
SBGP	35		S ≤ 400	50	30	40.5	16	30
	50	-0.050 -0.112		65	45	50.5	21	42

Order **Catalog No.** **D** - **S** SBGP is made to order.
SBGP 50 - 125

Connecting Rod

FOR BELL CRANK LIFTER UNIT

SBCR

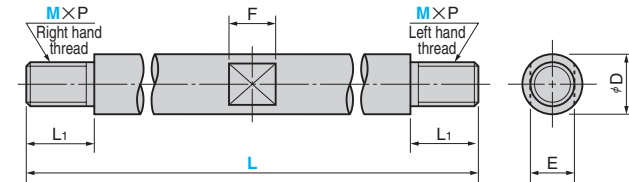

Material : SS400

Catalog No.	M	L In increments of 1 mm	D	P	L ₁	E	F
SBCR	20	L ≤ 350	25	2.5	30	19	20
	24		30	3.0	40	24	25
	27		35	3.0	40	30	30

Order **Catalog No.** **M** - **L** SBCR is made to order.
SBCR 24 - 250

