

Distance Stop Block



SQUARE TYPE

CAD FILE


For Distance Block Shim Plate

SQUARE TYPE


SDBH
SDBN

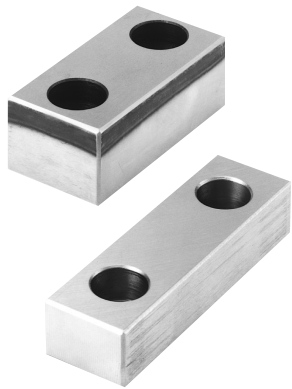

SDBH (Hardened Type)





SDBN



Material : S45C
Area to be induction hardened (Hatched Area)
HRC55 or more

SDBS

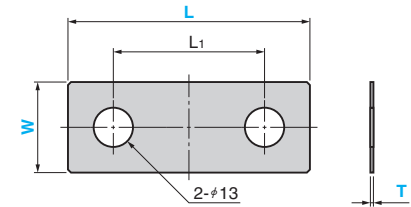

T	Tolerance
0.05	±0.01
0.1 0.2	±0.02
0.3 0.5	

Material : SUS304

H	L1	Catalog No.	W	L	T	Safety color				
6	30	SDBH SDBN	30	60	20	R(Red) Y(Yellow) N(None)				
	50			80						
	70			100						
15	30			60						
	50			80			30			
	70			100						
6	50		40	50	80		20			
	70				100					
	15				50			80	30	
70					100					
6					50			75		125
	70				100					
	15	50	80	30						
70		100	50							
20		80	60		120	30				
	100	70	140	30						
	75	75	125	50						

Order **Catalog No.** **W** - **L** - **T** - **Safety color**
SDBH 30 - 80 - 20 - R

Option **Option Code** **Specification**
TG When the same height is required, simultaneous grinding is carried out. Variation of dimension T is within +0.05~0.

Order **SDBH40 - 80 - 20 - Y - TG**

L1	Catalog No.	W	L	T
30	SDBS	30	80	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
50	SDBS	40	100	0.1
				0.2
				0.3
				0.5
				0.05
				0.1
70	SDBS	70	140	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
75	SDBS	75	125	0.3
				0.5
				0.05
				0.1
				0.2
				0.3

Order **Catalog No.** **W** - **L** - **T**
SDBS 40 - 80 - 0.1

The order unit is one piece.

L1	Catalog No.	W	L	T
50	SDBS	50	80	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
70	SDBS	70	100	0.1
				0.2
				0.3
				0.5
				0.05
				0.1
80	SDBS	75	125	0.2
				0.3
				0.5
				0.05
				0.1
				0.2
100	SDBS	70	140	0.3
				0.5
				0.05
				0.1
				0.2
				0.3