


# Guide Post

FOR BELL CRANK LIFTER UNIT

SBGP

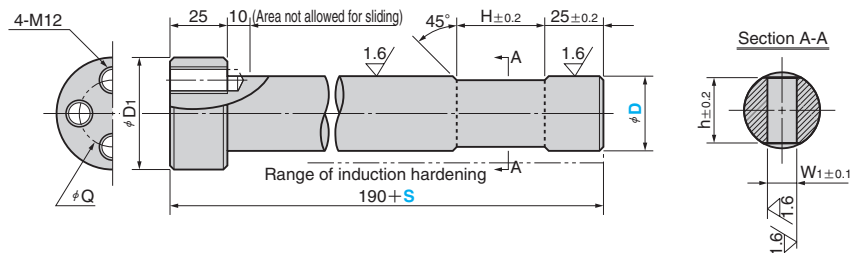

\*S refers to travel.

Material : S45C  
Hardness : HRC55 or more

Catalog No.	D	Tolerance	Travel S In increments of 1 mm	D <sub>1</sub>	Q	H	W <sub>1</sub>	h
SBGP	35		S ≤ 400	50	30	40.5	16	30
	50	-0.050 -0.112		65	45	50.5	21	42



Order


Catalog No.	D	-	S
SBGP	50	-	125

SBGP is made to order.

# Connecting Rod

FOR BELL CRANK LIFTER UNIT

SBCR

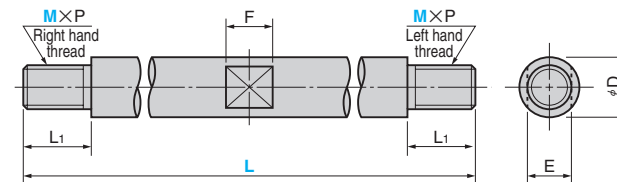

Material : SS400

Catalog No.	M	L In increments of 1 mm	D	P	L <sub>1</sub>	E	F
SBCR	20	L ≤ 350	25	2.5	30	19	20
	24		30	3.0	40	24	25
	27		35	3.0	40	30	30



Order

Catalog No.	M	-	L
SBCR	24	-	250

SBCR is made to order.



Example

