


# Blank Material for Oilless Bushing

Growing Cast Iron Type



## S30 (SO#30:Growing Cast Iron)

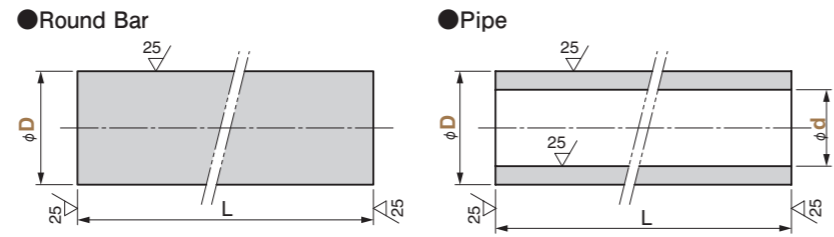

### ■ S30 (SO#30 : Growing Cast Iron Type)

It has excellent wear resistance and seizure resistance of casting, and it is the oil impregnated bearing that has internal porosity by repeated composition adjustment and heat treatment in the porosity.

#### ■ Features

- Less noise owing to porous structure.
- High dimensional stability due to uniform material quality.

#### ■ Application

- Where reduction in oil lubrication is desired.
- Where reduction in vibration and sliding noise is desired.

#### ■ Operation Range


Type	Lubricating Condition	Environment Condition	Max. Allowable Load P N/mm <sup>2</sup>	Max. Allowable Sliding Speed V m/min	Max. Allowable PV value N/mm <sup>2</sup> · m/min	Operation Range Temperature °C
SO#30	Regular lubrication	Atmosphere	10	60	75	-40 ~ +100

#### ■ Physical Properties

Type	Specific Gravity	Hardness HB	Tensile Strength N/mm <sup>2</sup>	Linear Expansion Coefficient × 10 <sup>-5</sup> /°C	Thermal conductivity W/(m · K)	Modules of longitudinal elasticity kN/mm <sup>2</sup>
SO#30	6.3 ~ 7.0	80*	70*	1.0 ~ 1.2	35 ~ 58	50 ~ 70

\* Numbers shown are just average.

#### ■ Friction characteristics

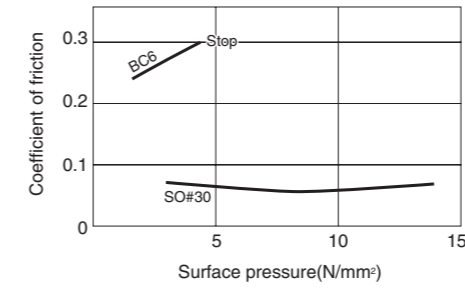

#### ● Drive Condition

- No lubrication, Intermittent rotation
- Speed V = 5m/min

### ■ S30 (SO#30 : Growing Cast Iron Type)

L	Catalog No.	D
		16
		21
		26
		31
		36
200	Round Bar Type S30	41
		46
		51
		56
		61
		66
		71

Order **Catalog No.** - **D**  
S30 - 21

L	Catalog No.	d	D
		29	43
			53
		39	56
			61
		49	66
			71
		59	76
200	Pipe Type S30		86
		69	91
			96
		79	101
			121
		89	111
			121
		99	126
			141

Order **Catalog No.** - **d** - **D**  
S30 - 29 - 43