


# Guide Pin

FOR LARGE DIE

RoHS

RGPS

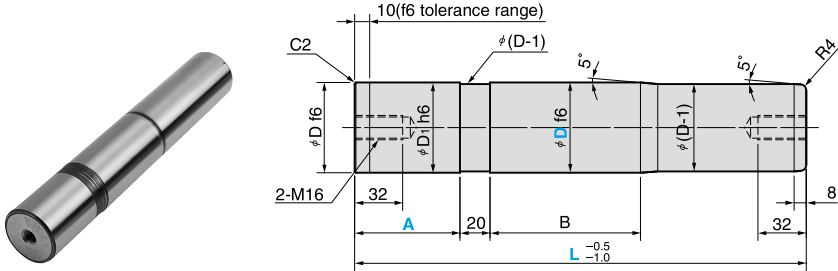

Material : S45C (C45) (A) 1045  
 Hardness : HRC55 ~ 60  
 Induction hardening at areas B

D f6		D1 h6		B	Catalog No.	D	L Increments of 5mm	A
60	-0.030	60	0	100	RGPS	60	220 ~ 400	70
	-0.049	80	-0.019				240 ~ 400	90
80	-0.049			80		-0.019	130	280 ~ 400
		300 ~ 400	120					



Order

Catalog No. **RGPS** D **60** - L **350** - A **70**



① shows loosening lock with bolt.

② shows loosening lock plate.



Option

Option Code	Specification						
<b>GM</b>	Tapped hole for assist pin mounting is drilled at the end. <table border="1" style="margin-left: 20px;"> <thead> <tr> <th>D</th> <th>Thread diameter (M) x Depth</th> </tr> </thead> <tbody> <tr> <td>60</td> <td>M30x35</td> </tr> <tr> <td>80</td> <td>M36x45</td> </tr> </tbody> </table>	D	Thread diameter (M) x Depth	60	M30x35	80	M36x45
D	Thread diameter (M) x Depth						
60	M30x35						
80	M36x45						




Order **RGPS 60 - 350 - 70 - GM**



Refer to page. 20 for the assist pin details.

•GM specification



D	d
60	36
80	41

