



Distance Stop Block


SQUARE TYPE

CAD FILE


SDBH
SDBN

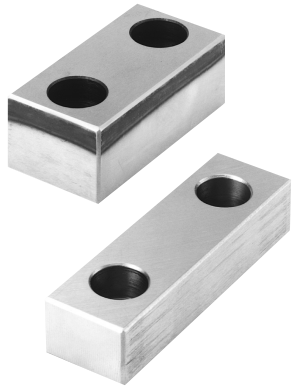

SDBH (Hardened Type)



SDBN



Material : S45C
Area to be induction hardened (Hatched Area)
HRC55 or more

H	L1	Catalog No.	W	L	T	Safety color		
6	30	SDBH SDBN	30	60	20	R(Red) Y(Yellow) N(None)		
	50			80				
	70			100				
15	30			60				
	50			80	30			
	70			100				
6	50		SDBH SDBN	40	80		20	R(Red) Y(Yellow) N(None)
	70				100			
	50				80			
15	70	100						
	50	80			30			
	70	100						
6	50	SDBH		50	80	30		
	70				100			
	50				80			
15	70		100					
	80		60		120	30		
	100		70		140	30		
20	75			75	125	50		

Order - - -
SDBH 30 - 80 - 20 - R

Option

Option Code	Specification
TG	When the same height is required, simultaneous grinding is carried out. Variation of dimension T is within +0.05~0.



Order

Copyright © Sankyo Oilless Industry, Inc. All Rights Reserved.

For Distance Block Shim Plate

SQUARE TYPE

SDBS

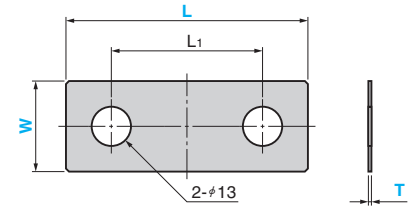

T	Tolerance
0.05	±0.01
0.1 0.2	±0.02
0.3 0.5	

Material : SUS304

L1	Catalog No.	W	L	T
30			60	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
				0.1
				0.2
				0.3
50		30	80	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
				0.1
				0.2
				0.3
70	SDBS		100	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
				0.1
				0.2
				0.3
50			80	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
				0.1
				0.2
				0.3
70		40	100	0.05
				0.1
				0.2
				0.3
				0.5
				0.05
				0.1
				0.2
				0.3

Order - -
SDBS 40 - 80 - 0.1

The order unit is one piece.

L1	Catalog No.	W	L	T			
50			80	0.05			
				0.1			
				0.2			
			50				0.3
							0.5
							0.05
			70			100	0.1
							0.2
							0.3
80	SDBS	60	120	0.05			
				0.1			
				0.2			
				0.3			
				0.5			
				0.05			
				0.1			
				0.2			
				0.3			
100		70	140	0.05			
				0.1			
				0.2			
			75				0.3
							0.5
							0.05
			75		75	125	0.1
							0.2
							0.3
				0.5			