

Wear Plate

Thickness 5 mm Bronze Thin Type


Slide Components

UWP


CAD FILE




● W=18~38, L=50~100
W=48, L=75~125





● W=75, L=75~125
W=100, L=100, 125



● W=18~48, L=150



● W=75, 100, L=150

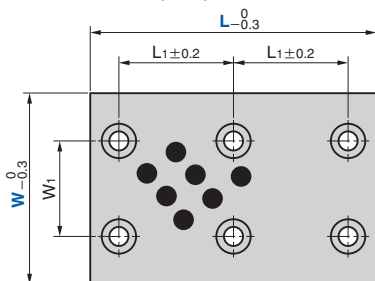

● Surface and all around R1.5 (Material) SO#50SP2
● Sliding Direction (Accessory) Bolts

W=18, W=28 L=50



W=28 L=75 or more




Catalog No.	W	L	W ₁	L ₁	d	h
UWP	18	50	-	20	6.5	1.5
		75		45		
		100		70		
	28	50	-	20		
		75		45		
		100		70		
38	50	-	20			
	75		45			
	100		70			
UWP	48	75	-	45	10	0.8
		100		70		
		125		95		
	75	150	-	60		
		75		45		
		100		70		
100	125	-	45			
	150		70			
	150		95			



Order

Catalog No. UWP W 75 L 150

● Recommended Flat Head Bolt



⚠ When tapped holes for mounting are drilled on the mating part, chamfer corners as shown below.

