


Guide Post

EUROPEAN STANDARD

DIN9825 (ISO9182)

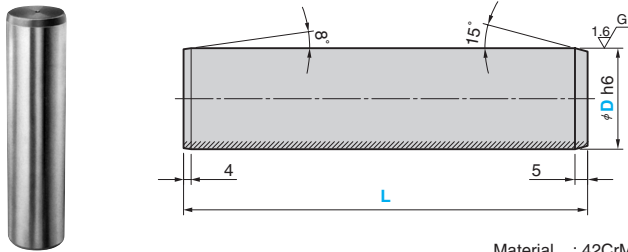

Material : 42CrMo4V
(SCM440)
Hardness : HRC60~64(Hatched Area)
(Depth 1.0~1.5mm)

Catalog No.	Type	D	L
			140
			160
		24	170
			180
			190
			200
			220
		25	140
			160
			170
			180
			190
			200
			220
		30	140
			160
			170
			180
			190
			200
			220
			240
			250
		32	140
			160
			170
			180
			190
			200
			220
			240
			250

Catalog No.	Type	D	L
			160
			180
		40	200
			220
			240
			250
			280
			160
			180
			200
		42	220
			240
			250
			280
DIN9825	01		180
			200
			220
		50	240
			260
			280
			300
			320
			180
			200
			220
		52	240
			260
			280
			300
			320

Catalog No.	Type	D	L
			200
			220
			240
		60	260
			280
			300
			320
			350
			200
			220
			240
		63	260
			280
DIN9825	01		300
			320
			350
			260
			280
		80	300
			350
			400
			450
			500
			300
			350
		100	400
			450
			500

D h6	
24	0
25	-0.013
30	
32	
40	0
42	-0.016
50	
52	
60	0
63	-0.019
80	
100	0
	-0.022



Order

Catalog No. - Type - D - L
DIN9825 - 01 - 30 - 200 (DIN 9825-01-30-200)