


# ルーズコア用 傾斜ピン ノック穴付タイプ

INCLINED PIN FOR LOOSE CORE

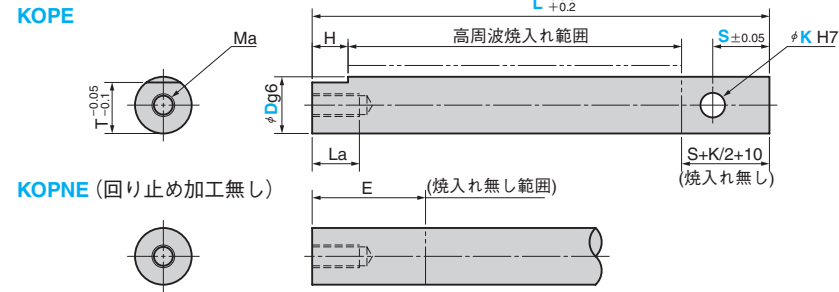

材質 SUJ2  
 -----部高周波焼入れ  
 (HRC58以上)  
 深さ0.8~2.0mm


D g6	T	H	Ma×La	E	Catalog No.	D	L 指定 1mm 単位	S 指定 1mm 単位	K
16	$\begin{matrix} -0.006 \\ -0.017 \end{matrix}$	13	14	M 8×20	30	KOPE	16	10 ~ 25	6
20		17	17	M10×25	40				
25	$\begin{matrix} -0.007 \\ -0.020 \end{matrix}$	22	18	M12×25	50	KOPNE	100 ~ 1000	15 ~ 40	10
30		27	19		60				
35	$\begin{matrix} -0.009 \\ -0.025 \end{matrix}$	31	19	M16×35	60			20 ~ 45	13
40		36	20						

Order

Catalog No.	D	L	S	K
KOPE	16	300	S15	K6
KOPNE	25	600	S35	K10

# ルーズコア用 傾斜ピン 二面幅タイプ

INCLINED PIN FOR LOOSE CORE

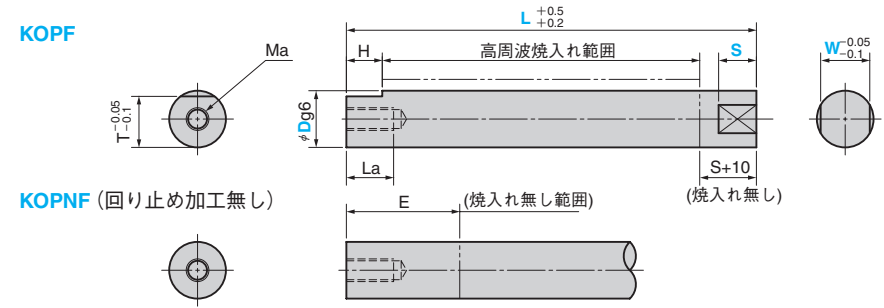

材質 SUJ2  
 -----部高周波焼入れ  
 (HRC58以上)  
 深さ0.8~2.0mm

D g6	T	H	Ma×La	E	Catalog No.	D	L 指定 1mm 単位	S 指定 1mm 単位	W 選択
10	$\begin{matrix} -0.005 \\ -0.014 \end{matrix}$	8.5	7	M 5×10	20	KOPF	10	10 ~ 25	6 8
12	$\begin{matrix} -0.006 \\ -0.017 \end{matrix}$	10	8.5	M 6×15	30				
16		13	14	M 8×20	KOPNF	16	100 ~ 1000	15 ~ 40	12 14
20		17	17	M10×25					
25	$\begin{matrix} -0.007 \\ -0.020 \end{matrix}$	22	18	M12×25	50	25		20 ~ 25	19 21 23
30		27	19						

Order

Catalog No.	D	L	S	W
KOPF	16	300	S15	W14
KOPNF	25	600	S30	W21