



TWX


● W = 28 ~ 75

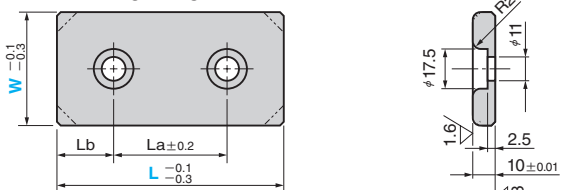

● W = 100 以上

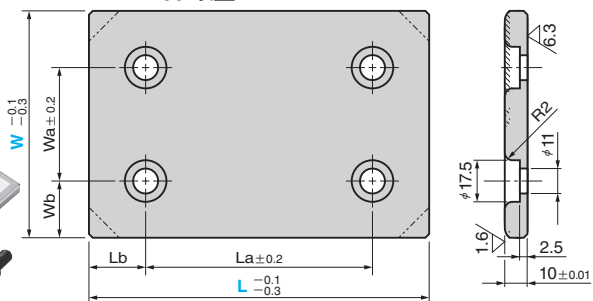

● W = 48、L = 250
W = 75、L = 250・300

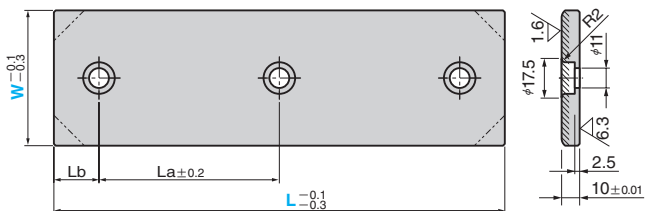

● W=28




● 付属品特殊低頭取付ボルト (LCS 規格)
LCS-10-20


● スライド方向



● W=38-48

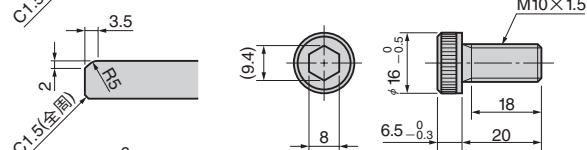

● W=75以上



材 質 銅系粉末焼結 (# 220)
線部焼結層
厚さ 1.2mm 以上
S45C (ベースプレート)
付属品 取付ボルト

Wa	Wb	La	Lb	Catalog No.	W	L
		45	15			75
		50			28	100
		75	25			125
		100				150
		45	15			75
		50			38	100
		75	25			125
		100				150
		45	15			75
		50			48	100
		75	25			125
		100				150
		100	50			200
		25			75	75
		50				100
		75	25	TWX		125
		100				150
		150			100	200
		100				250
		100	50			300
		50				100
		75			125	125
		100	25			150
		150				200
		200				250
		75			150	125
		100				150
		150	25			200
		200				250
		100			200	150
		150	25			200
		200				300
		100	50			100
50	25	100			100	150
		150	25			200
		200				250
		200	50			300
75		75			125	125
		100				150
		150	25			200
		200				250
50	37.5	100			150	150
		150	25			200
		200				300
		100	50			150
100	25	150			200	200
		200	25			200
		200				250
		200				300



Order

Catalog No.	W	-	L
TWX	38	-	150



Option

オプションコード	仕様
CM	コーナー逃がし用の面取加工 (4ヶ所) を行います。 ご注文の際には C 面寸法を指示ください。 ex.CM17 (6 ≤ C < W/2, Max C17)

● CM 仕様



Order

TWX 75 - 100 - CM17