

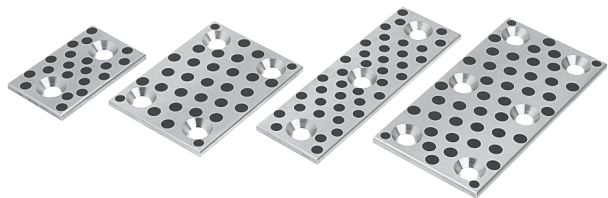


UWP
UWPC (4-C 面取りタイプ)


- W=18 ~ 38, L=50 ~ 100
W=48, L=75 ~ 125






- W=75, L=75 ~ 125
W=100, L=100 ~ 125




- W=18 ~ 48, L=150



- W=75 · 100, L=150

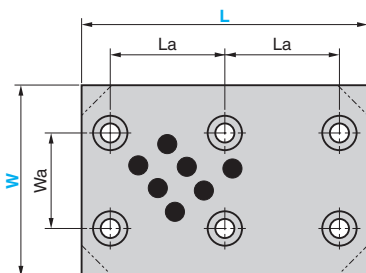

● スライド方向



材 質 銅合金 (SP2)
オイルレス加工
付属品 皿ボルト

⚠ 相手側に取付用タップ加工をする場合、
下図要領にて面取り加工を行ってください。

Wa	La	d	h	取付ボルト	Catalog No.	W	L
—	20	6.5	1.5	M6		18	50
	45						75
	70						100
—	60						150
	20						50
	45						75
—	70					28	100
	60						150
	20						50
—	45					38	75
	70						100
	60						150
—	45						75
	70						100
	60						150
—	70	10	0.8	M8		48	100
	95						125
	60						150
45	45						75
	70						100
	95						125
70	60						150
	70						100
	95						125
—	60					100	125
	70						150




Order

Catalog No.	W	—	L
UWP	75	—	150
UWPC	48	—	100

● UWPC 4-C 面取り仕様詳細

W	C面取り数値
28	10
38	13
48	
75	17
100	



■ 特注品のご相談・ご注文も承ります。