

オイルレスライドプレート



銅系粉末焼結タイプ 板厚 20mm

SO#220



RoHS

SOX





●W=28~75

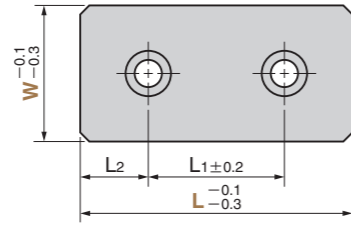

●W=100以上

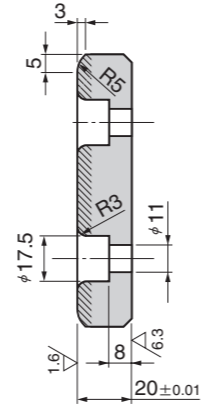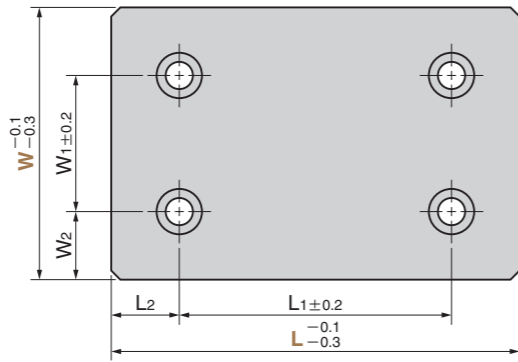

SOXT (2穴タイプ)

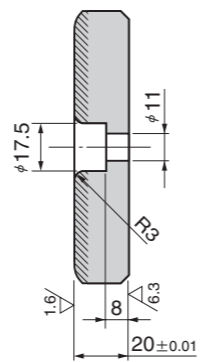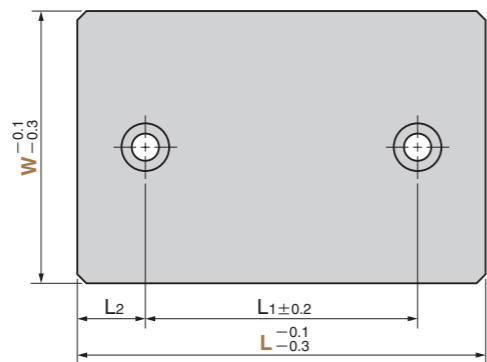

材質 銅系粉末焼結 (SO#220)
 //部焼結層
 厚さ 1.2mm 以上
 SS400 (ベースプレート)

使用範囲

給油条件	環境条件	許容最高面圧 P N/mm ²	許容最高速度 V m/min	許容最高 PV 値 N/mm ² · m/min	使用温度範囲 ℃
無給油	大気中	50	30	100	-40 ~ +120
定期給油 (脂)		75	60	150	

物性

比重 g/cm ³	硬さ HRM	圧縮強度 N/mm ² (0.2%耐力)	含油率 %
6.2±0.3	70 ~ 90	200 ~ 250	18 以上

W1	W2	L1	L2	Catalog No.	W	L	
						SOX	SOXT
		45	15			75	
		50	25		28	100	
		100					150
		45	15			75	
		50	25		38	100	
		100					150
		45	15			75	
		50	25			100	
		75				48	125
-	-	100	50	SOX		150	-
		45					200
		50	15			75	
		100				58	100
		25	25			150	
		50					75
		75	25			100	
		100				75	125
		150	25			150	
		200					200
		50	50			100	100
		75					125
50	25	100	50		100	150	150
		150					200
		200	50			250	250
		75			SOX SOXT		300
		100	25			125	-
50	37.5	150				125	150
		200	50			200	200
		75					250
100	25	100	25			300	-
		150				150	150
		200				200	200
						250	250

* W1 · W2 は SOX (W = 100 以上) のみの寸法です。

Order	Catalog No.	W	-	L
	SOX	28	-	75
	SOXT	100	-	100

■特注品のご相談・ご注文も承ります。