


# カムスライドガイド Vガイドタイプ

CAM SLIDE GUIDE


CAD FILE

カム用スライド部品

CBSL

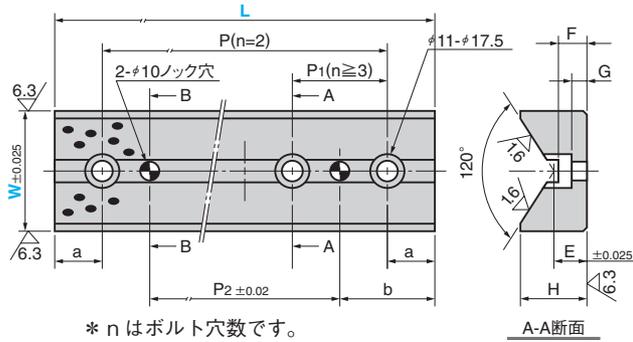


● スライド方向  
↔




材質 銅合金 (SO-2)  
オイルレス加工

CBSPL

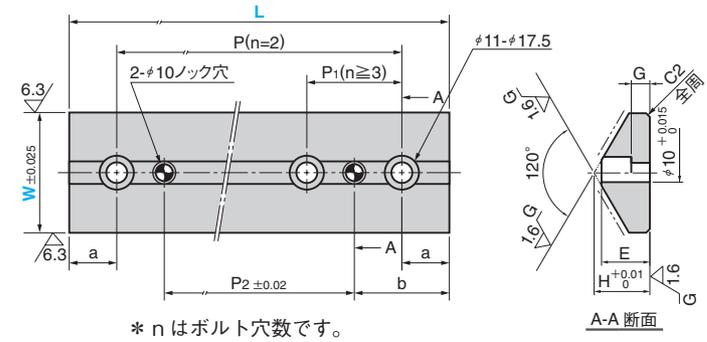

● CBSL と CBSPL の組み合わせ  
h=50



\* ---部 高周波焼入れ  
材質 S45C 硬さ HRC55 以上

H	a	b	P	P <sub>1</sub>	ボルト穴数 n	P <sub>2</sub>	E	F	G	Catalog No.	W	L
37	20	40	60	—	2	20	20	20	10	CBSL	65	100
			75	25		125						
			100	50		150						
	—	75	100	200								
		100	150	250								
		125	200	300								

Order   -   
CBSL 65 - 150

H	a	b	P	P <sub>1</sub>	ボルト穴数 n	P <sub>2</sub>	E	G	Catalog No.	W	L
30	20	40	60	—	2	20	26	10	CBSPL	65	100
			75	25		125					
			100	50		150					
	25	50	75	100	200						
			100	150	250						
			125	200	300						

Order   -   
CBSPL 65 - 150

■特注品のご相談・ご注文も承ります。