




オイルレススライドプレート



FCタイプ
板厚20mm
SO#50F

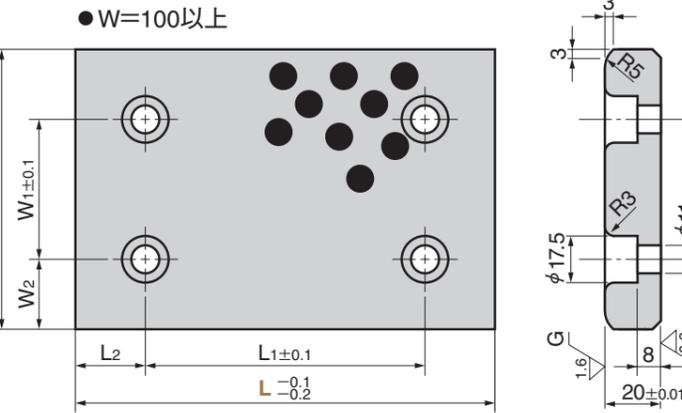

SESF (FCスタンダードタイプ)

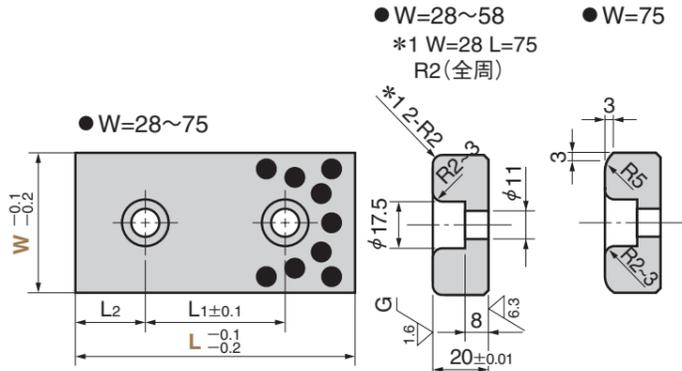

SESFT (FC・2穴タイプ)

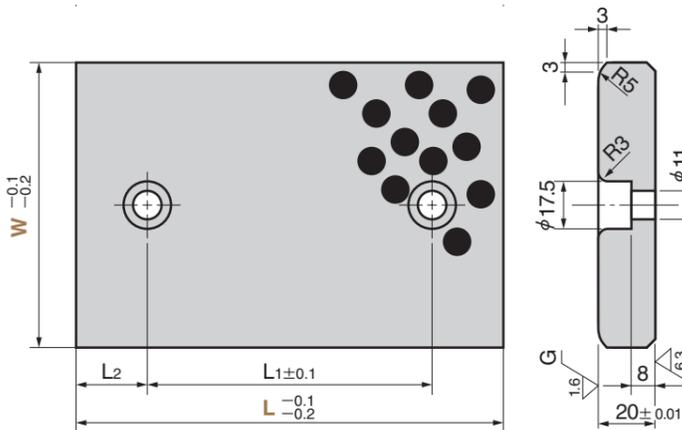

材質 母材 FC250 相当
固体潤滑剤(GR-1)

■ 使用範囲

潤滑剤の種類	給油条件	環境条件	許容最高面圧 P N/mm ²	許容最高速度 V m/min	許容最高 PV 値 N/mm ² · m/min	使用温度範囲 ℃
GR-1	無給油	大気中	5	10	30	-50~+300
	定期給油(脂)			15	50	-50~+150

▲ 使用温度は+150℃以下です。+150℃を超える場合は潤滑剤の埋設仕様が異なります。営業までご相談ください。

■ 物性

比重	硬さ HB	伸び %	引張強さ N/mm ²	線膨張係数 ×10 ⁻⁵ /℃
7.1~7.3	160~220	—	150~250	1.0

W ₁	W ₂	L ₁	L ₂	Catalog No.	W	L	
						SESF	SESFT
		45	15			75	
		50				100	
		75			28	125	
		100	25			150	
		150				200	
		45	15			75	
		50				100	
		75			38	125	
		100	25			150	
		150				200	
		45	15			75	
		50				100	
		75		SESF	48	125	
		100	25			150	
		150				200	
		45	15			75	
		50				100	
		75			58	125	
		100				150	
		25				75	
		50	25			100	
		75				125	
		100			75	150	
		150				200	
		200				250	
		100	50			300	
		50				100	100
		75				125	125
50	25	100	25		100	150	150
		150				200	200
		200				250	250
			50			300	—
		75				125	125
		100		SESF		150	150
50	37.5	150	25	SESFT	125	200	200
		200				250	250
			50			300	—
		100				150	150
		150				200	200
100	25	200			150	250	250
		250	25			300	300
		150				200	—
150	25	200		SESF	200	250	—
		250				300	—



Order	Catalog No.	W	—	L
	SESF	48	—	75
	SESFT	125	—	125