
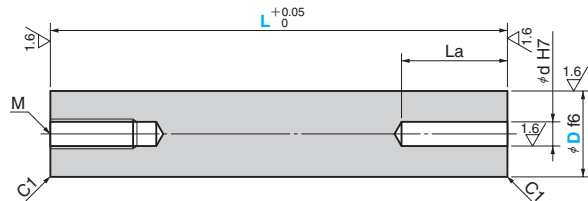


Ejector Guide Pin

STRAIGHT TYPE(WITH TAPPED HOLE / DOWEL HOLE)

RoHS

EGPB



Material : SUJ2 (I B1 A 52100)
Hardness : HRC58 or more
Induction Hardened

D f6	d H7	La	M	Recommended Dowel Pin(h7)	Catalog No.	D	L (Increments of 5 mm)
25						25	50~100
							105~125
							130~150
							155~175
							180~200
							205~225
							230~250
30	-0.020 -0.033	10	+0.015 0	20	M10 depth 20	10×40	255~275
							280~300
							50~100
							105~125
							130~150
							155~175
							180~200
35	-0.025 -0.041	16	+0.018 0	25	M12 depth 25	16×50	205~225
							230~250
							255~275
							280~300
							50~100
							105~125
							130~150

D f6	d H7	La	M	Recommended Dowel Pin(h7)	Catalog No.	D	L (Increments of 5 mm)
40						40	105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
50	-0.025 -0.041	16	+0.018 0	25	M12 depth 25	16×50	280~300
							305~325
							330~350
							105~125
							130~150
							155~175
							180~200
60	-0.030 -0.049					60	205~225
							230~250
							255~275
							280~300
							305~325
							330~350
							355~400



Order

Catalog No. **EGPB** D **30** - L **250**