
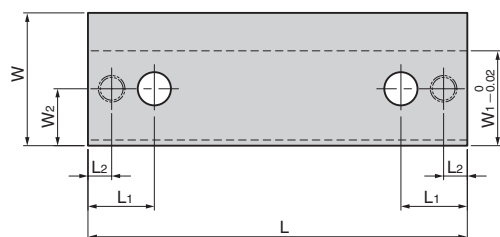

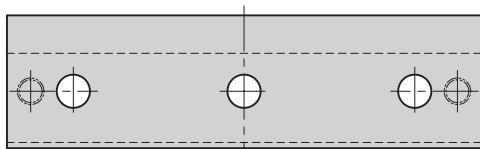



VSOL-□

● For $L \leq 200$ 

⚠ T and t have the adjusting allowance of 0.5 mm.

● For $L = 250$ 

⚠ Dowel pin hole ($\phi d1$) is not machined.

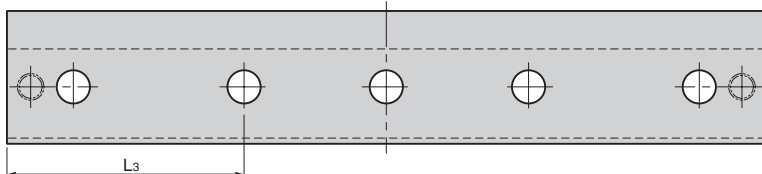● For $L = 400$ 

● Sliding Direction



Material : Bronze with
Graphite
(SO#50 SP2)

Catalog No.	W	L	W ₁	W ₂	L ₁	L ₂	L ₃	T	t	d	d ₁
VSOL-01	25	125	18	9				15.5	8.5	9	6
VSOL-02		160									
VSOL-03		125									
VSOL-04	32	160	22	11	27.5	10		30.5	15.5	11	8
VSOL-05		200									
VSOL-06	55	100	37	20			—	55.5	39.5	13.5	10
VSOL-07		160									
VSOL-11		160									
VSOL-12	70	200	50	30	35	12.5		75.5	55.5	17.5	12
VSOL-13		250									
VSOL-15		400									
VSOL-16	85	160	63	38	42.5	15	—	90.5	65.5	22	16
VSOL-17		200									
VSOL-18		250									
VSOL-20		400									



Order

Catalog No.

VSOL-12

■ Recommended Mounting Bolt and Dowel Pin

Catalog No.	W	L	Recommended Mounting Bolt DIN 912	Recommended Dowel Pin DIN7979
VSOL-01	25	125	M8×30	φ6×20
VSOL-02		160		
VSOL-03		125		
VSOL-04	32	160	M10×50	φ8×40
VSOL-05		200		
VSOL-06	55	100	M12×80	φ10×60
VSOL-07		160		
VSOL-11		160		
VSOL-12	70	200	M16×100	φ12×70
VSOL-13		250		
VSOL-15		400		
VSOL-16	85	160	M20×120	φ16×70
VSOL-17		200		
VSOL-18		250		
VSOL-20		400		



Example

