




UWP
UWPC(4-C chamfering Type)

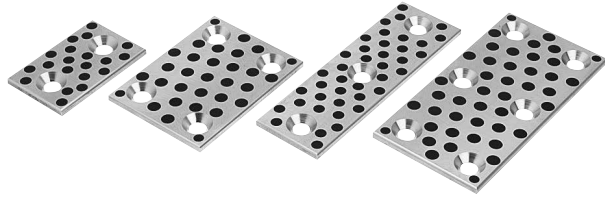


- W= 18 to 38, L= 50 to 100
W= 48, L= 75 to 125





- W=18 to 48, L=150




- W= 75, L= 75 to 125
W= 100, L= 100 and 125




- W= 75 and 100, L= 150

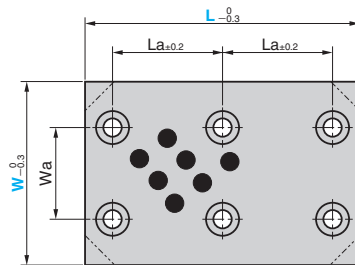

- Flat Head Bolt



- Sliding Direction



Material : Bronze with Graphite
(SO#50 SP2)
Accessory : Flat Head Bolt

⚠ When tapped holes for mounting are drilled on the mating part, chamfer corners as shown below.


Wa	La	d	h	Mounting Bolt	Catalog No.	W	L
—	20	6.5	1.5	M6	UWP	18	50
—	45						75
—	70						100
—	60						150
—	20						50
—	45					28	75
—	70						100
—	60						150
—	20						50
—	45					38	75
—	70						100
—	60						150
—	45				UWP		75
—	70	10	0.8	M8	UWPC	48	100
—	95						125
—	60						150
45	45						75
—	70					75	100
—	95						125
—	60						150
70	70						100
—	95					100	125
—	60						150



Order

Catalog No.	W	—	L
UWP	75	—	150
UWPC	48	—	100

- UWPC 4-C chamfering specification



W	Size of chamfering
28	10
38	13
48	
75	17
100	

■ We are ready to accept requests or orders for special parts.