



Distance Stop Block

Square Type


Die Setting Components

SDBH (Hardened Type)


SDBN

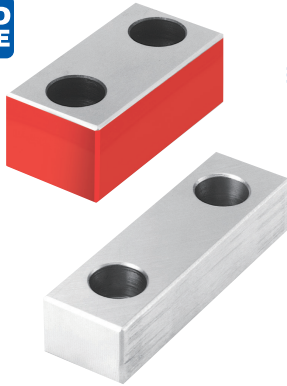

SDBH



SDBN



(Material) 1045 (S45C)
(Hardness) HRC50~
Hatched area to be Induction Hardened

Catalog No.	W	L	T	Safety color	H	L ₁
	30	60	20		6	30
		80				50
		100				70
	40	60	30	R (Red) Y (Yellow) N (None)	15	30
		80				50
		100				70
SDBH	50	80	20		6	50
SDBN		100				70
		80				30
	100	70				
	100	50				
	60	120	30		15	80
		140				100
SDBH		125				75



Order

Catalog No.	W	-	L	-	T	-	Safety color	-	Option
SDBH	30	-	80	-	20	-	R	-	
SDBH	40	-	80	-	20	-	Y	-	TG



Option

Option Code	Specification
TG	When the same height is required, simultaneous grinding is carried out. Variation of dimension T is within + 0.05 ~ 0.