
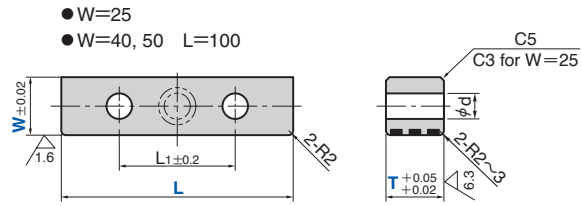


# Cam Side Block




## Cam Slide Components

MCSRG (FC Type)  
MCSRW (Bronze Type)

CAD FILE

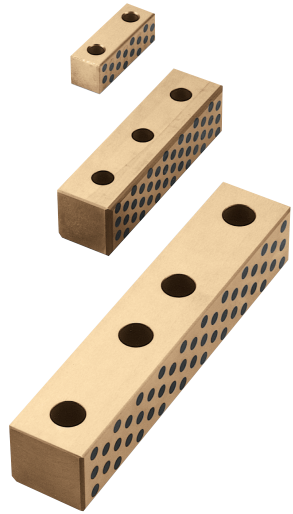

Holes for safety bolt are optional for W=40 and 50 only.

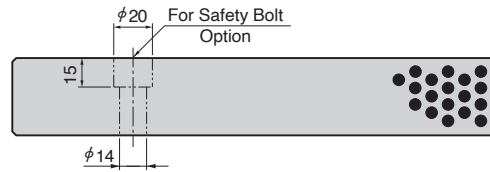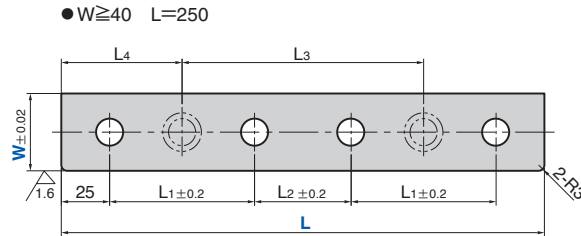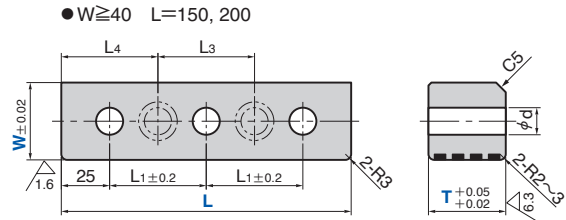

● Sliding Direction  
↔

MCSRG (Material) SO#50F  
MCSRW (Material) SO#50SP2

Catalog No.	W	L	T	L1	L2	L3	L4	d		
	25	75	25	45				11		
		100		50						
		125		75						
		150		100						
	40	100	30	50				14		
		150		75		50	50			
		200		75		75	62.5			
		100		40	50					14
		150			50		50		50	
		200			75		75		62.5	
MCSRG MCSRW		100	45	50						
		150		75		50	50			
		200		75		75	62.5			
		250		50		125	62.5			
		100		55	50					20
		150			75		50		50	
200	75	50	125		62.5					
	50	150	60	50			50	50		
		200		75		75	62.5			
		150		70	50			50	50	
		200			75		75	62.5		
		250		75	50	125	62.5			



Catalog No.	W	L	T	Option
MCSRG	40	200	30	
MCSRW	50	200	45	ZA



Option Code	Specification
ZA	Bolt holes to prevent falling of cam side block are drilled. W=40 and 50 only.



● When this block is used together with cam slide plate or wear plate.

Wear Plate Thickness	MCSRG Thickness T	Cam Slide Plate Thickness
10	30	20
	45	35
	60	50
20	40	20
	55	35
	70	50

