


エジェクタガイドピン ストレートタイプ (タップ穴・ロック穴付)

EJECTOR GUIDE PIN

CAD FILE

EGPB

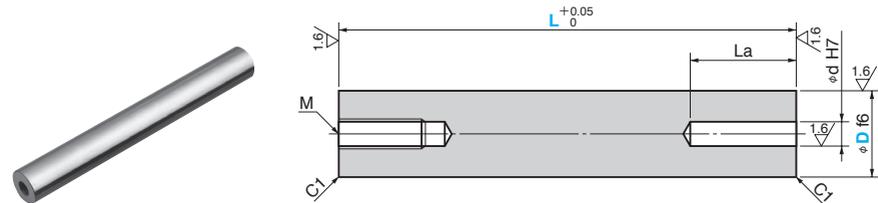

材質 SUJ2
硬さ HRC58以上
高周波焼入れ

D f6	d H7	La	M	推奨ノックピン (h7)	Catalog No.	D	L (指定5mm単位)
25	10	20	M10 深さ20	10×40	EGPB	25	50~100
							105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
							280~300
							330~350
30	10	20	M10 深さ20	10×40	EGPB	30	105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
							280~300
							330~350
							355~400
35	16	25	M12 深さ25	16×50	EGPB	35	105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
							280~300
							330~350
							355~400

D f6	d H7	La	M	推奨ノックピン (h7)	Catalog No.	D	L (指定5mm単位)
40	16	25	M12 深さ25	16×50	EGPB	40	105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
							280~300
							305~325
							330~350
50	16	25	M12 深さ25	16×50	EGPB	50	105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
							280~300
							305~325
							330~350
60	16	25	M12 深さ25	16×50	EGPB	60	105~125
							130~150
							155~175
							180~200
							205~225
							230~250
							255~275
							280~300
							305~325
							330~350



Order

Catalog No. EGPB
D 30 - L 250

エジェクタガイドピン