


オイルレススライドプレート



銅系粉末焼結タイプ
板厚10mm
SO#220




TWX (焼結スタンダードタイプ)

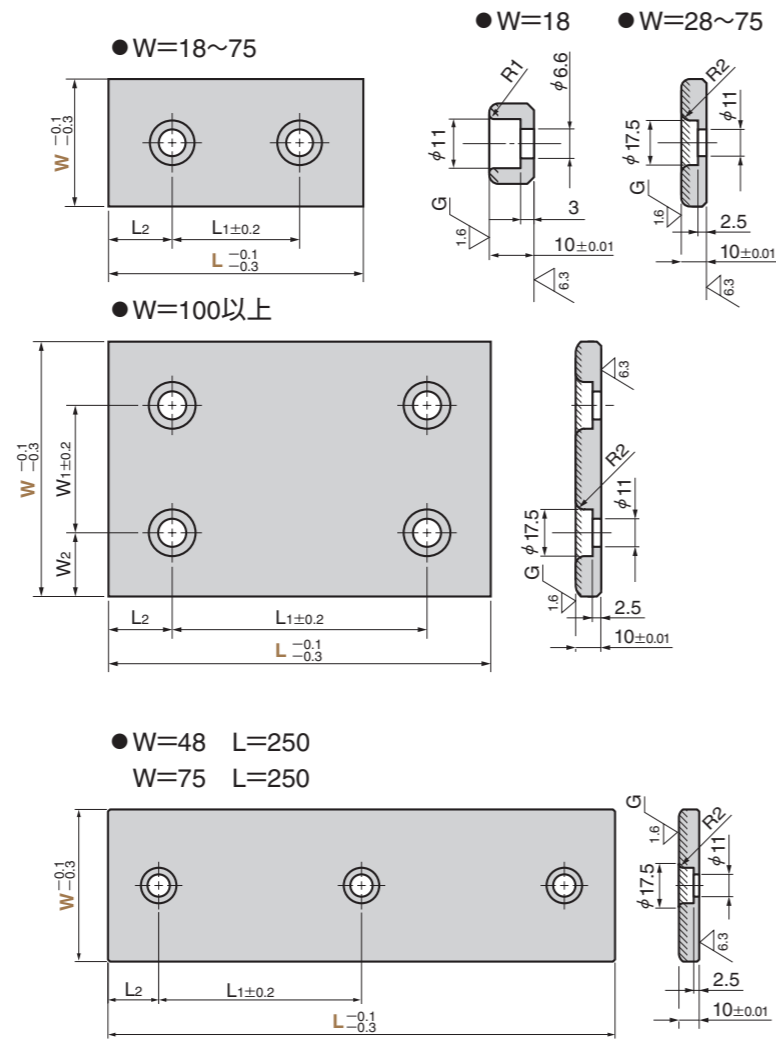

TWXT (焼結・2穴タイプ)

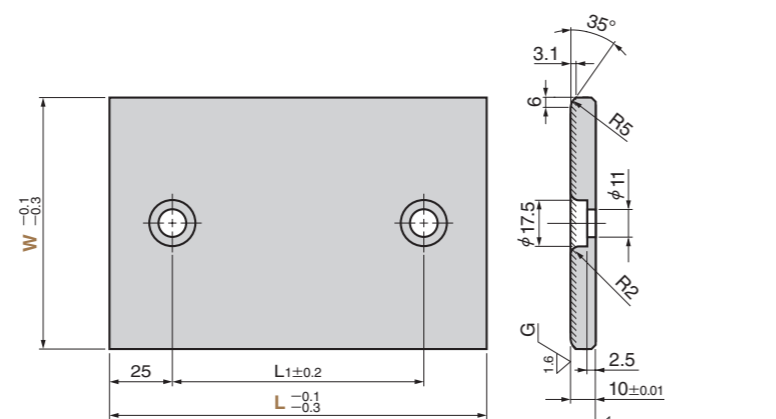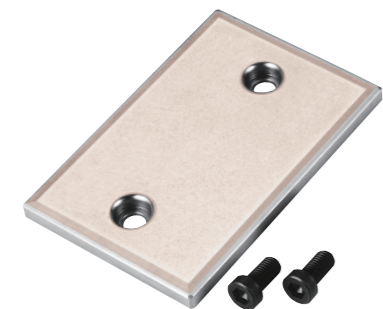

●スライド方向



材質 銅系粉末焼結 (SO#220)
//// 部焼結層
厚さ1.2mm 以上
S45C (ベースプレート)
付属品 特殊低頭取付ボルト

■ 使用範囲

給油条件	環境条件	許容最高面圧 P N/mm ²	許容最高速度 V m/min	許容最高 PV値 N/mm ² ・m/min	使用温度範囲 °C
無給油	大気中	50	30	100	-40~+120
定期給油(脂)		75	60	150	

■ 物性

比重	硬さ HRM	圧縮強度 N/mm ² (0.2%耐力)	含油率 %
6.2±0.3	70~90	200~250	18以上


W ₁	W ₂	L ₁	L ₂	Catalog No.	W	L	
						TWX	TWXT
		45	15			75	
		50			18*	100	
		75	25			125	
		100				150	
		45	15			75	
		50			28	100	
		75	25			125	
		100				150	
		45	15			75	
		50			38	100	
		75	25			125	
		100				150	
		45	15			75	
		50		TWX		100	
		75	25		48	125	
						150	
						200	
						250	
		45	15			75	
		50			58	100	
		100				150	
		25				75	
		50	25		75	100	
		75				125	
		100				150	
		150				200	
		100				250	
		50				100	100
		75				125	125
50		100	25		100	150	150
	25	150				200	200
		200				250	250
			50			300	
75		75		TWX		125	125
		100		TWXT		150	150
		150	25		125	200	200
50	37.5					250	250
		200				300	
		100				150	150
		150	25		150	200	200
		200				250	250

* TWX18はボルトが付属していません。



Order **Catalog No.** **W** - **L**
TWX 48 - 150

●付属品特殊低頭取付ボルト LCS10-20

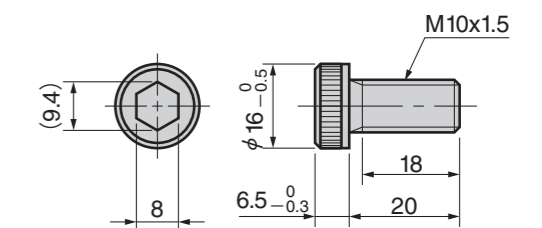

■ 特注品のご相談・ご注文も承ります。