


# ガイドピン フランジタイプ

## GUIDE PIN



RGPA

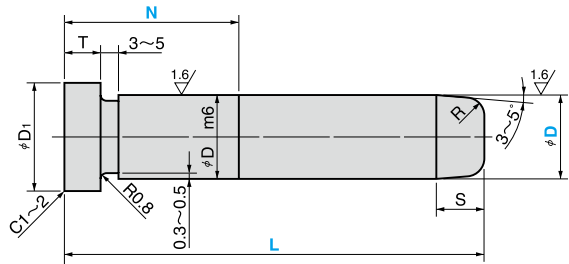

材質 SUJ2  
硬さ HRC58以上  
高周波焼入れ

D		D m6	T	D1	S	Catalog No.	D	L (指定5mm単位)	圧入部 N (指定1mm単位)
20		20		25		RGPA	20	75~200	8~100
25	-0.020 -0.033	25	+0.021 +0.008	30	5		25	105~300	8~120
30		30		35			30	130~350	8~130
35		35		40			35	155~400	
40	-0.025 -0.041	40	+0.025 +0.009	10	45		40	155~450	10~200
50		50		12	55	50	12~200		



Order

Catalog No. **RGPA**    D **25** - L **200** - N **50**