
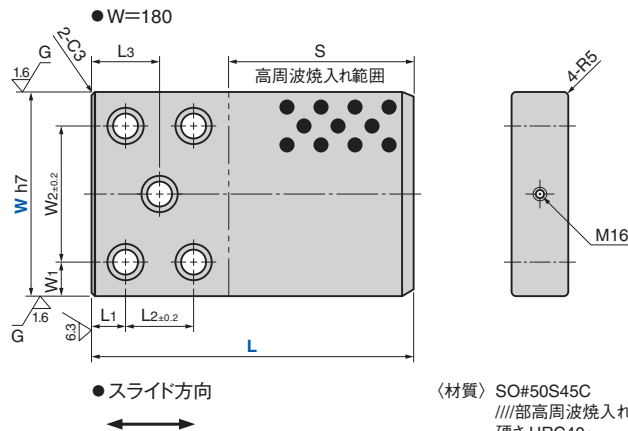
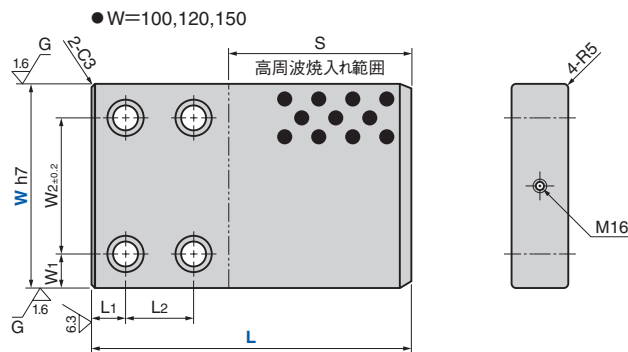


ガイドバー 座ぐり穴タイプ

GUIDE BAR

NGBZ

CAD
FILE

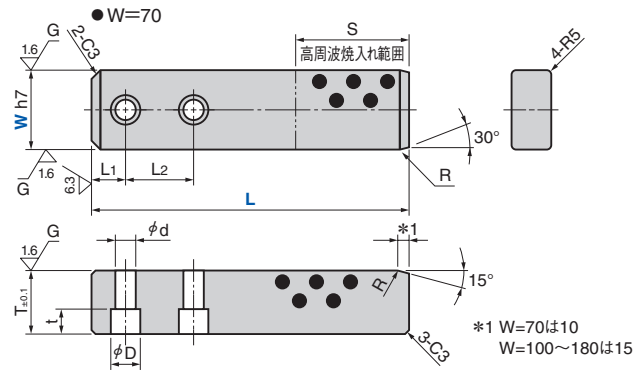

〈材質〉SO#50S45C
////部高周波焼入れ
硬さ HRC40~

Catalog No.	W	L	W	h7	L1	L2	L3	W1	W2	D	d	t	S	T
	70	230				60							100	
		260	70	0 -0.030	25	75		-	-	26	18	18	160	35
		300				150							150	
		350				60							160	
	100	280	100			100		20					200	45
		330		0 -0.035		120	-	60					160	
		390				60							200	
	120	280	120			100				32	22	22	160	
		330			30	120							190	50
		390				60		30	90				160	
	150	280	150			80							190	55
		330		0 -0.040		140							160	
		390				60	60						190	
	180	280	180			80	70						160	
		330				140	100	120					190	
		390												



Catalog No. W L
NGBZ 70 - 230

ダイガイド部品