

ウェアプレート


板厚10mm 焼結タイプ

WEAR PLATE


TWX (焼結スタンダードタイプ)




●W=18~75





●W=18





●W=28~75



●W=100以上

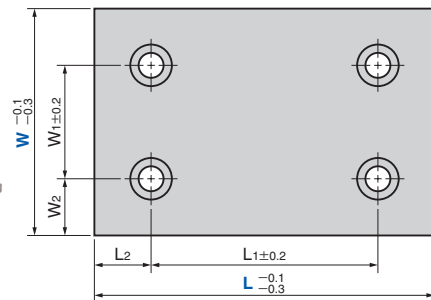

●W=48 L=250
W=75 L=250

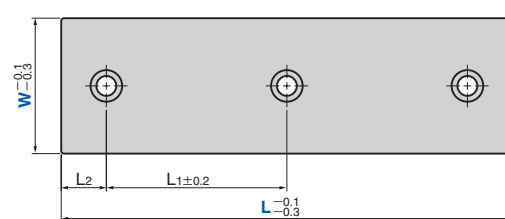

●スライド方向



〈材 質〉 SO#220
////部焼結層 厚さ1.2mm以上
S45C (ベースプレート)
〈付属品〉 特殊低頭ボルト


Catalog No.	W	L	W ₁	W ₂	L ₁	L ₂
		75			45	15
	18*1	100			50	
		125			75	25
		150			100	
		75			45	15
	28	100			50	
		125			75	25
		150			100	
		75			45	15
	38	100			50	
		125			75	25
		150			100	
		75			45	15
	48	100	—	—	50	
		125			75	25
		150				
		200			100	50
		250				25
		75			45	15
TWX	58	100			50	
		150			100	
		75			25	
	75	100			50	
		125			75	25
		150			100	
		200			150	
		250			100	
		100			50	
		125			75	
	100	150	50	25	100	25
		200			150	
		250			200	
		300				50
		125	75		75	
	125	150			100	
		200	50	37.5	150	25
		250			200	
		300				50
	150	150			100	
		200	100	25	150	25
		250			200	

*1 TWX18はボルトが付属していません。



Catalog No.	W	—	L
TWX	48	—	150

●付属品特殊低頭取付ボルトLCS10-20

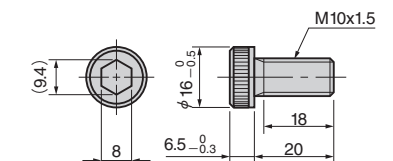

▶ 稜部面取仕様P.112参照。