


カムスライドガイド Vガイドタイプ

CAM SLIDE GUIDE

CBS

CAD
FILE

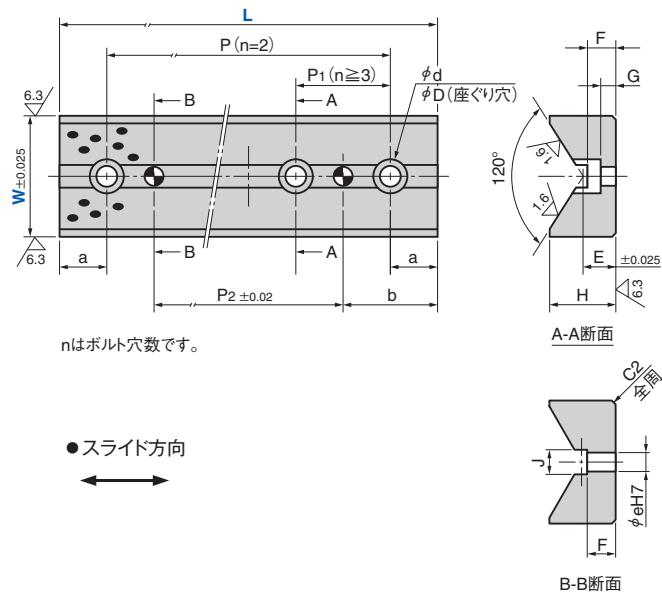

〈材質〉 SO#50SP2


Catalog No.	W	L	H	a	b	P	P ₁	ボルト穴数 n	d	D	e	P ₂	E	F	G	J
	35	75	24	15	30	45			9	14	8	15	15		4	11
		100			60	20										
		125		20	40	85						45				
		150			110	70										
CBS	50	75	31	15	30	45	—	2				15		15		13
		100		20	40	60						20				
		125				75						25				
		150				100						50				
	65	100	35	20	40	60			11	17.5	10	20	18		8	
150						50										
200						100										
250						150										
300						200										



Catalog No. CBS W 35 L 125




●CBSとCBSPの組合せ寸法



W	h
35	35
50	50
65	65

CBSP

CAD
FILE

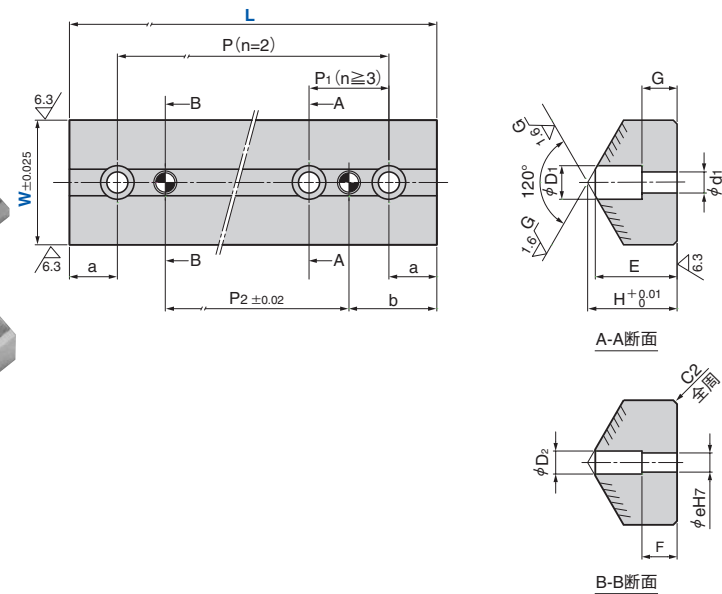

〈材質〉 S45C
////部高周波焼入れ
硬さ HRC50~

Catalog No.	W	L	H	a	b	P	P ₁	ボルト穴数 n	d ₁	D ₁	E	e	D ₂	F	P ₂	G	
	35	75	20	15	30	45	—	2	9	14	17	8	10	12	15	4	
		100			60										20		
		125		20	40	85											45
		150				110											70
CBSP	50	75	32	15	30	45	—	2			29		12	20	15	10	
		100		20	40	60											20
		125				75											25
		150		25	50	100											50
	65	100	47	20	40	60	50	3	11	17.5		10			20	20	
150															50		
200															100		
250		25		50	—	150											
300															200		



Catalog No. CBSP W 35 L 125

■ご使用にあたって

異物滞留防止のため、CBSは上型に取付け、
CBSPは下型に取付けてください。

