


Guide Post

EUROPEAN STANDARD

DIN9825 (ISO9182)

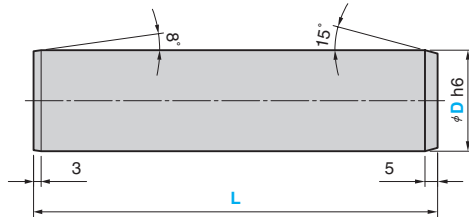

Material : 42CrMo4V
(SCM440)
Hardness : HRC60~64
(Depth 1.0~1.5mm)

Catalog No.	Type	D	L
			140
			160
		24	170
			180
			190
			200
			220
		25	140
			160
			170
			180
			190
			200
			220
DIN9825	01		140
			160
			170
		30	180
			190
			200
			220
			240
			250
		32	140
			160
			170
			180
			190
			200
			220
			240
			250

Catalog No.	Type	D	L
			160
			180
		40	200
			220
			240
			250
			280
		42	160
			180
			200
			220
			240
			250
			280
DIN9825	01		180
			200
			220
		50	240
			260
			280
			300
			320
			180
			200
			220
		52	240
			260
			280
			300
			320

Catalog No.	Type	D	L
			200
			220
			240
		60	260
			280
			300
			320
			350
		63	200
			220
			240
			260
DIN9825	01		280
			300
			320
			350
			260
			280
		80	300
			350
			400
			450
			500
			300
			350
		100	400
			450
			500

D h6	
24	$\begin{matrix} 0 \\ -0.013 \end{matrix}$
25	$\begin{matrix} 0 \\ -0.013 \end{matrix}$
30	$\begin{matrix} 0 \\ -0.016 \end{matrix}$
40	$\begin{matrix} 0 \\ -0.016 \end{matrix}$
42	$\begin{matrix} 0 \\ -0.016 \end{matrix}$
50	$\begin{matrix} 0 \\ -0.019 \end{matrix}$
60	$\begin{matrix} 0 \\ -0.019 \end{matrix}$
63	$\begin{matrix} 0 \\ -0.019 \end{matrix}$
80	$\begin{matrix} 0 \\ -0.022 \end{matrix}$
100	$\begin{matrix} 0 \\ -0.022 \end{matrix}$



Order

Catalog No. - Type - D - L
DIN9825 - 01 - 30 - 200

(DIN 9825-01-30-200)