


Inclined Pins

FOR KOCU-S

RoHS

BOK

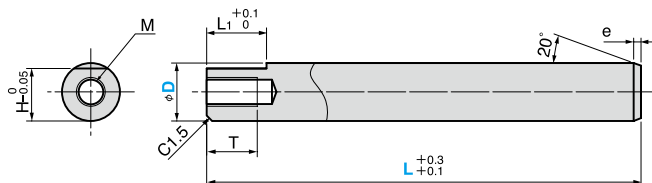

Material

EN Standard	JIS	AISI·ASTM	ISO
1.1213(Cf53)	S50C	1049	C50
1.7225(42CrMo4V)	SCM440	4140	42CrMo4
1.7131(16MnCr5)	SCr415	—	16MnCr5
1.4112(X90CrMov18)	—	—	—

Hardness :HRC58～62

D	Tolerance		L ₁	T	e	H	M	Catalog No.	D	Tolerance	L Increments of 1mm	Material (EN Standard)	
	h7	g6											
8	0	-0.005	8.5	7	2	7	M4	BOK	8	h7 g6	L ≤ 1000	1.1213 1.7225 1.7131 1.4112	
10	-0.015	-0.014	10.5	8		9	M5		10				
12	0	-0.006	12.5	10		11	M6		12				
16	-0.018	-0.017	16.5	14		14.5	M8		16				
20	0 -0.021	-0.007 -0.020	20.5	18	3	18	M10		20	h7 g6	L ≤ 1500		1.1213 1.7225 1.7131 1.4112
25			25.5	23		22.5	M12		25				
30			30.5	24		27			30				
35			35.5			32			35				
40	0	-0.009	40.5			36	M16		40	L ≤ 2000	1.1213 1.7225 1.7131 1.4112		
45	-0.025	-0.025	45.5	32		40			45				



Order

Catalog No. — D — L — Material
BOK — 30h7 — 900 — 1.7225