
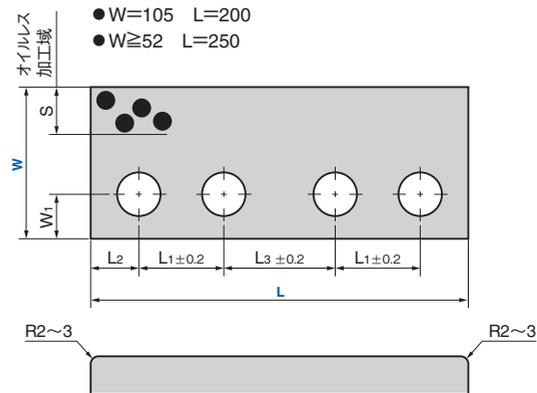
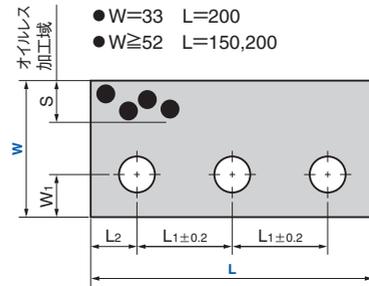


カムアッププレート

CAM UPPER PLATE

MCUW (銅合金タイプ)
MCUF (FCタイプ)
MCUS (スチールタイプ)

CAD
FILE

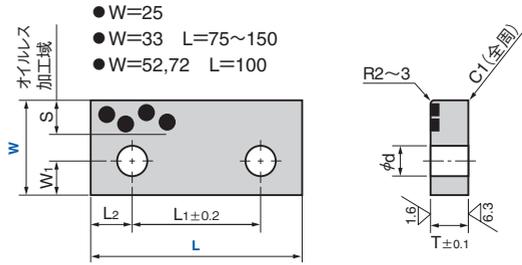

● スライド方向



MCUW (材質) SO#50SP2
MCUF (材質) SO#50F
MCUS (材質) SO#50S45C
////部高周波焼入れ
硬さ HRC40~

Catalog No.	W	L	T	L1	L2	L3	W1	S	d
MCUW	25	75	10	45	15		8	7.5	9
		100		50	25				
		125		75					
	33	75		45	15	-	12.5	9	11
		125		75					
		150		100					
MCUW MCUF MCUS	52	100	20	50		50	20	13	13
		150		75					
		200							
	72	100		30	50	25	-	22	
		150			75				
		200							
MCUW MCUF	77	150	35	50	-	50	25	27	18
		200		75					
		250							
	82	150		40	50	-	50	32	
		200			75				
		250							
MCUW MCUF	105	150	40	50	-	50	32		
		200		75					
		250		75		50			



Order

Catalog No.	W	-	L
MCUW	33	-	75
MCUF	52	-	150
MCUS	82	-	250

●カムアッププレートとカムサイドブロックMCSRГ, MCSRW (P.149) 対応表

カム サイドブロック	カムアップ プレート	W					
		33	52	72	77	82	105
W	25	○	-	-	-	-	-
	40	-	○	-	-	-	-
	50	-	-	○	○	○	○

MCUW33-200, MCUW105, MCUF105に対応するカムサイドブロックの規格はありません。



カム用スライド部品

カムサイドブロック

CAM SIDE BLOCK

MCSRG (FCタイプ)
MCSRW (銅合金タイプ)

CAD
FILE

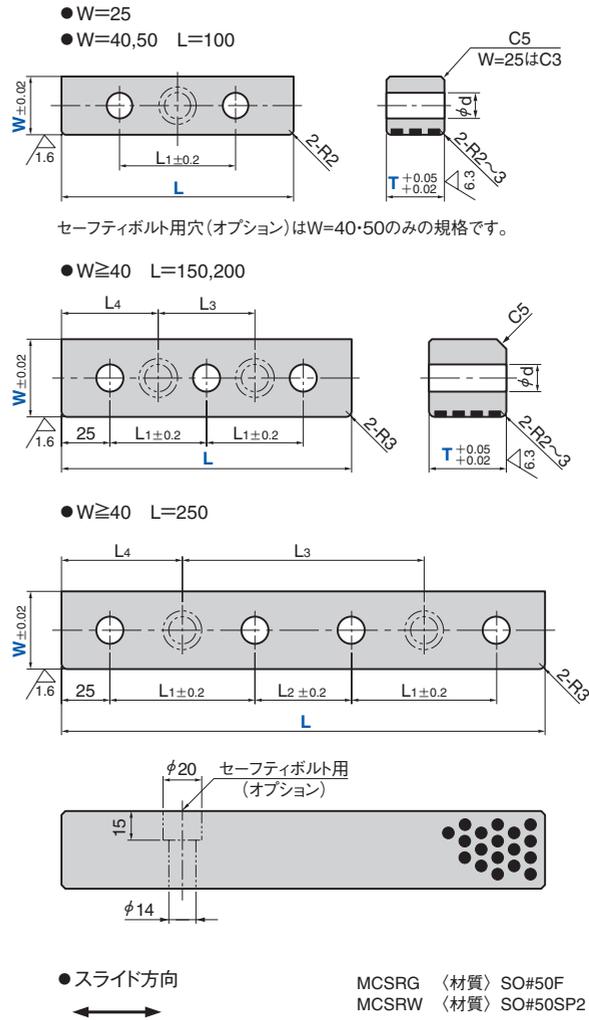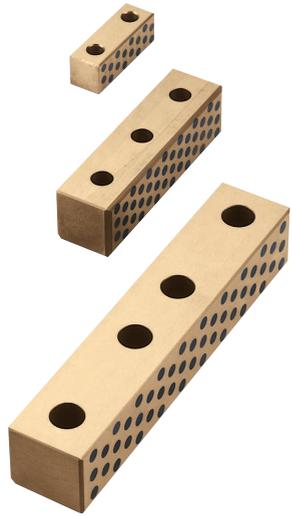


Catalog No.	W	L	T	L ₁	L ₂	L ₃	L ₄	d		
	25	75	25	45	-	-	-	11		
		100		50						
		125		75						
		150		100						
	40	100	30	50	-	-	-	14		
		150		75		50	50			
		200		75		75	62.5			
		100		40		50	-		-	14
		150				50	50		50	
		200				75	62.5		62.5	
MCSRG MCSRW		100	45	50	-	-	-			
		150		75		50	50			
		200		75		62.5	62.5			
		250		50		125	62.5			
	50	100	55	50	-	-	-	20		
		150		75		50	50			
		200		75		50	50			
		250		50		125	62.5			
		150		60		50	-		50	50
		200				75	75		62.5	
		150				50	50		50	
						200	70		75	-
250	50		125		62.5					

Order	Catalog No.	W	L	T	Option
	MCSRG	40	200	30	
	MCSRW	50	200	45	ZA

オプションコード	仕様
ZA	カムサイドブロック落下防止用ボルト穴加工を行います。W=40,50のみです。

● カムスライドプレート、ウェアプレートとの使用例

ウェアプレート板厚	MCSRG板厚 T	カムスライドプレート板厚
10	30	20
	45	35
	60	50
20	40	20
	55	35
	70	50

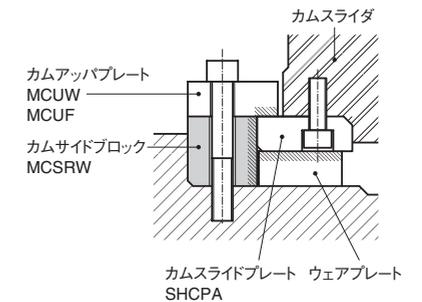

カム用スライド部品